



DON T2/HT2


for analysis of Deoxynivalenol (DON)
and T2- and HT2-Toxin (T2/HT2) in Feed



Deoxynivalenol (DON)

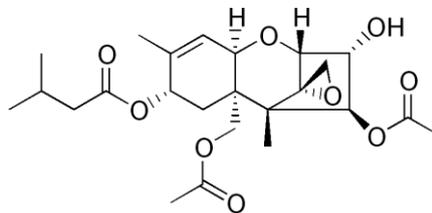

T2-Toxin (T2)

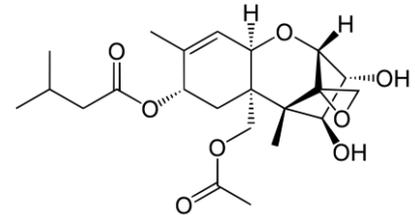

HT2-Toxin (HT2)

Specification

Lot No.	2785702260217275
Matrix Type	Feed
Analyte	Deoxynivalenol (DON), T2- and HT2-Toxin (T2/HT2)
Weight/Volume	50 g
Storage	-15/-25 °C
Shipping	ambient
Retest	02/2029

	Concentration x_{PT} [µg/kg]	data points n	satisfactory range*** $x_{PT} \pm 2 \sigma_{PT}$ [µg/kg]	uncertainty* $2 u(x_{PT})$ [µg/kg]
Deoxynivalenol	1104,30	12	615,32 - 1593,28	209,72
T2-Toxin	79,36	8	32,95 - 125,77	24,06
HT2-Toxin	175,50	8	82,55 - 268,45	30,66
T2/HT2-Toxin total	250,69	8	118,12 - 383,25	43,16

*Expanded uncertainty with $k=2$ for approximately 95% level of confidence (PA/PH/OMCL(18)153R1 CORR Evaluation of Measurement Uncertainty - Annex 2.5).

***If $u(x_{PT}) \geq 0.3 \sigma_{PT}$ the standard uncertainty of the assigned value is included in the assessments.

Comments

aokin reference matrix material is naturally contaminated and homogenized. Concentration of the analyte is determinate in a proficiency round. Unweighted mean value of the means of accepted sets of data, each set being obtained in a different laboratory and/or with a different method of determination such as HPLC--MS/MS, HPLC/DAD, HPLC/FLD, HPLC/MS, HPLC/UV, LC-MS/MS, UHPLC-MS/MS, aokin, ELISA.

The certified value and its uncertainty are traceable to the International System of Units (SI) as chemical mass fraction as $\mu\text{g}/\text{kg}$. The assigned value, the satisfactory range and the expanded uncertainty are given.

The minimum amount of sample to be used is 10 g.

Calculation of the assigned value x_{PT}

The Assigned Value is the value attributed to a particular property of interlaboratory proficiency test (definition from ISO13528:2016). x_{PT} is derived from participants quantitative results obtained with confirmatory analysis. The procedure for determining is from the Algorithm A (ISO 13528:2016) or from the median.

The standard uncertainty is expanded by a factor $f = 1,25$ and is calculated as:

$$u(x_{PT}) = f \frac{\sigma_{PT}}{\sqrt{n}} \text{ (uncertainty of the characterization)}$$

where:

- σ_{PT} is the robust estimate of the participant standard deviation;
- $\sigma_{PT} = b \cdot x_{PT}$ where b is the relative robust estimate of the participant standard deviation
- n is the number of participants used in calculating the robust assigned values.

The satisfactory range is calculated from the expanded ($k=2$) standard deviation of the proficiency assessment: The satisfactory range equals $x_{PT} \pm 2 \sigma_{PT}$. If $u(x_{PT}) \geq 0.3 \sigma_{PT}$ the standard uncertainty of the assigned value is included in the assessments.