
aokin ReferenceMatrixMaterial

ZON DON

Order No.: RMM-12-2503r

for analysis of Zearalenone (ZON) and Deoxynivalenol (DON) in Corn

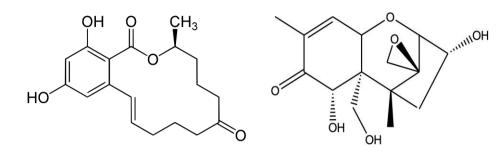

Zearalenone (ZON)

Deoxynivalenol (DON)

Specification

| Lot No. | 122503221025275 | | |
|---------------|---|--|--|
| Matrix Type | Corn | | |
| Analyte | Zearalenone (ZON), Deoxynivalenol (DON) | | |
| Weight/Volume | 50 g | | |
| Storage | -18 °C | | |
| Retest | 10/2025 | | |

| | Concentration x_{PT} [µg/kg] | data points n | satisfactory range $x_{PT}~\pm 2~\sigma_{PT}~[\mu{ m g}/{ m kg}]$ | uncertainty* $2 u(x_{PT})[\mu g/kg]$ |
|----------------|--------------------------------|------------------|---|--------------------------------------|
| Deoxynivalenol | 1348,48 | 17 | 809,31 - 1888,38 | 125,28 |
| Zearalenone | 396,47 | 15 | 222,03 - 570,92 | 57,54 |

*Expanded uncertainty with k=2 for approximately 95% level of confidence (PA/PH/OMCL(18)153R1 CORR Evaluation of Measurement Uncertainty - Annex 2.5).

aokin AG · Robert-Rössle-Str. 10 · 13125 Berlin · Germany Tel. +49 30 94 89 21 60 · Fax +49 30 94 89 21 61 · info@aokin.com· www.aokin.com

aokin ReferenceMatrixMaterial

Comments

aokin reference matrix material is naturally contaminated and homogenized. Concentration of the analyte is determinate in a proficiency round. Unweighted mean value of the means of accepted sets of data, each set being obtained in a different laboratory and/or with a different method of determination such as GC/MS, HPLC-MS/MS, HPLC/DAD, HPLC/MS, HPLC/UV, LC-MS/MS.

The certified value and its uncertainty are traceable to the International System of Units (SI) as chemical mass fraction as $\mu g/kg$. The assigned value, the satisfactory range and the expanded uncertainty are given. The minimum amount of sample to be used is 10 g.

Calculation of the assigned value x_{PT}

The Assigned Value is the value attributed to a particular property of interlaboratory proficiency test (definition from ISO13528:2016). x_{PT} is derived from participants quantitative results obtained with confirmatory analysis. The procedure for determining is from the Algorithm A (ISO 13528:2016) or from the median.

The standard uncertainty is expanded by a factor f = 1,25 and is calculated as: $u(x_{PT}) = f \frac{\sigma_{PT}}{\sqrt{n}}$ (uncertainty of the characterization) where:

- σ_{PT} is the robust estimate of the participant standard deviation;
- $\sigma_{PT} = b \cdot x_{PT}$ where b is the relative robust estimate of the participant standard deviation
- n is the number of participants used in calculating the robust assigned values.

The satisfactory range is calculated from the expanded (k=2) standard deviation of the proficiency assessment: The satisfactory range equals $x_{PT} \pm 2 \sigma_{PT}$.